

Technical Data Sheet

Right Angle Lens Chip LED with Bi-Color(Multi-color)

12-22/S2GVC-A09/2C

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.



Descriptions

- The 12-22 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications


- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


Device Selection Guide


Chip			Long Colon	
Type Material		Emitted Color	Lens Color	
S2	AlGaInP	Brilliant Orange	W. Cl	
GV	AlGaInP	Green	Water Clear	


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 1 of 12

Package Outline Dimensions










For reflow soldering (propose)



Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	S2:25 GV25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	S2:60 GV:60	mA
Power Dissipation	Pd	S2:60 GV:60	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}$ C
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\mathbb{C}$
Soldering Temperature	Reflow Soldering : 260 °C for 10 sec Hand Soldering : 350 °C for 3 sec.		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 12



Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
	S2	45.0		112		
Luminous Intensity	I_V				mcd	
	GV	14.5		36.0		
Viewing Angle	2 \theta 1/2		120		deg	
	S2		611			
Peak Wavelength	λρ				nm	
	GV		568			
	S2		605			
Dominant Wavelength	λd				nm	I _F =20mA
	GV		565			
Spectrum Radiation Bandwidth	S2		17			
	Δλ				nm	
	GV		20			
Forward Voltage	S2	1.7	2.0	2.4		
	V_{F}				V	
	GV	1.7	2.0	2.4		
Reverse Current	I_R			10	μ A	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±10%

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 4 of 12 Prepared by:Lu zhongwei

Device No:SZDSE-122-A09 Prepared date: 13-Oct-2006



Bin Range Of Luminous Intensity

S2

Bin	Min	Max	Unit	Condition
P	45.0	72.0	mcd	I _F =20mA
Q	72.0	112		

$\mathbf{G}\mathbf{V}$

Bin	Min	Max	Unit	Condition
1	14.5	22.5		I _F =20mA
2	22.5	36.0	mcd	

Notes:

1. Tolerance of Luminous Intensity ±10%

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A09

http://www.everlight.com

Rev 1


Page: 5 of 12


Prepared date: 13-Oct-2006 Prepared by:Lu zhongwei


EVERLIGHT ELECTRONICS CO.,LTD.


12-22/S2GVC-A09/2C


Typical Electro-Optical Characteristics Curves S2


















Prepared by:Lu zhongwei


Typical Electro-Optical Characteristics Curves GV


















Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

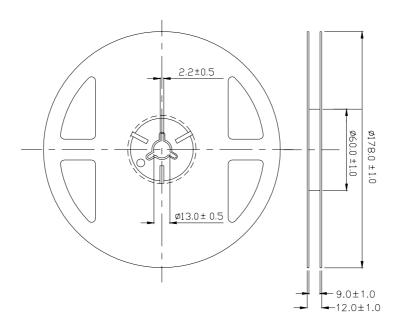

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A09


http://www.everlight.com Prepared date: 13-Oct-2006 Rev 1

Page: 8 of 12

Prepared by:Lu zhongwei




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

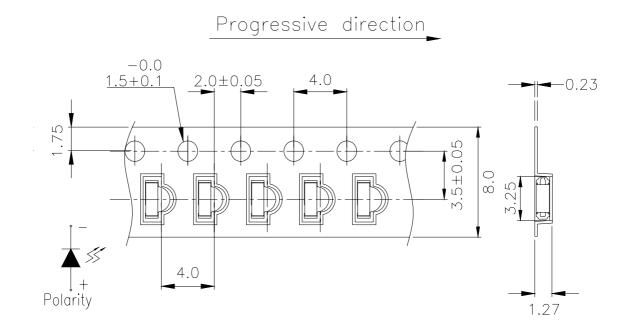

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

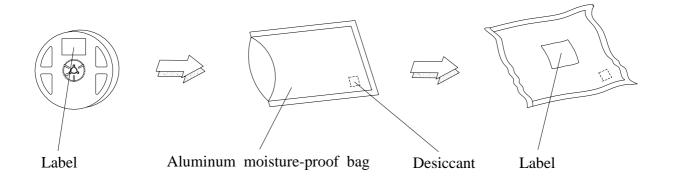

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A09

http://www.everlight.com

Rev 1

Page: 9 of 12

Prepared date: 13-Oct-2006

Prepared by:Lu zhongwei



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 12


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

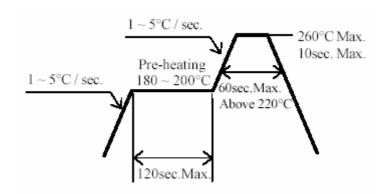

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 11 of 12




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

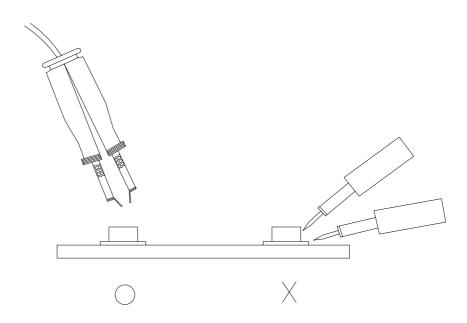

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 12 of 12