EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

Right Angle Lens Chip LEDs with Bi-Color (Multi-Color)

12-22/GHBHC-A01/2C

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- RoHS refer to SMD B TYPE SGS report

Descriptions


- The 12-22 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Type	Material	Emitted Color	Lens Color	
GH	InGaN	Brilliant Green	W. Cl	
ВН	InGaN	Brilliant Blue	Water Clear	

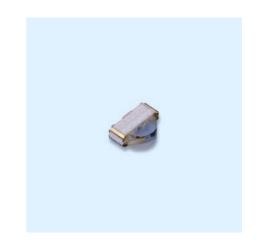


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 1 of 11 Device No: DSE-122-069

Prepared date: 30-May-2005 Prepared by: Ashley Kuo



Package Outline Dimensions

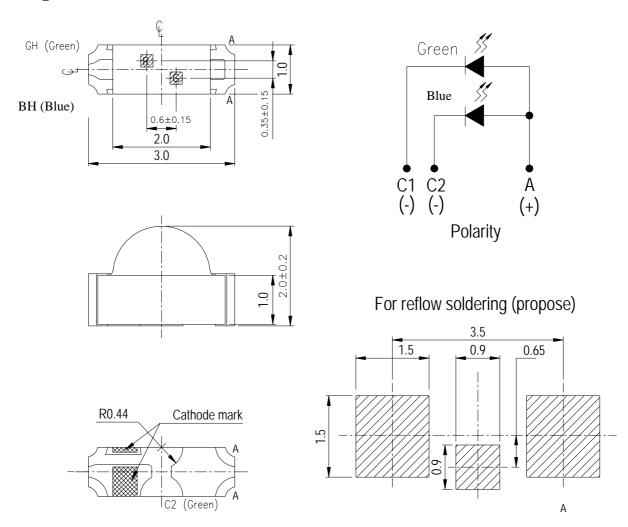

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 2 of 11

Device No: DSE-122-069 Prepared date: 30-May-2005 Prepared by: Ashley Kuo



Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	${ m I}_{ m F}$	GH:25	mA	
		BH:25		
Operating Temperature	Operating Temperature Topr		$^{\circ}\!\mathbb{C}$	
Storage Temperature	age Temperature Tstg -40~ +90		$^{\circ}\!\mathbb{C}$	
Caldarina Tanananatana	Tsol	260	$^{\circ}$	
Soldering Temperature		(for 5 second)	C	
Electrostatic Dischause	ESD	GH:150	V	
Electrostatic Discharge		BH:150	V	
Danna Diania dia a	Pd	GH:110	mW	
Power Dissipation		BH:110		
Peak Forward Current				
(Duty 1/10 @1KHz)	Ifp	BH:100	mA	
C 11 · T		Reflow Soldering : 260 °C for 10 sec.		
Soldering Temperature	Tsol	Hand Soldering: 350 °C for 3 sec.		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 11

Device No: DSE-122-069 Prepared date: 30-May-2005 Prepared by: Ashley Kuo



Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol		Min.	Тур.	Max.	Unit	Condition
* * * * * * * * * * * * * * * * * * * *	Iv	GH	63	130		1	
Luminous Intensity		ВН	40	90		mcd	
Viewing Angle	2 θ 1/2			120		deg	
D 1 W 1 1	λр	GH		518		nm	IF=20mA
Peak Wavelength		ВН		468			
Dominant Wavelength	λd	GH		525		nm	
_		ВН		470			
Spectrum Radiation	Δλ	GH		35			
Bandwidth		ВН		35		nm	
Forward Voltage	VF	GH		3.3	3.8	V	
1 of ward voltage		ВН		3.3	3.8		
Reverse Current	IR	GH			50	μ A	V _R =5V
Reverse Current		ВН			50		


Notes:


- 1. Tolerance of Luminous Intensity $\pm 10\%$
- 2.Tolerance of Forward Voltage ±0.05V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 4 of 11


Typical Electro-Optical Characteristics Curves


GH

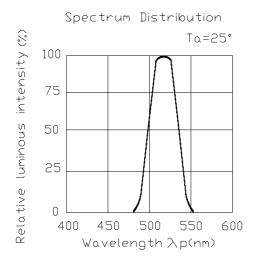




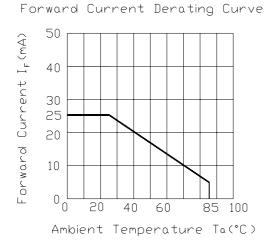

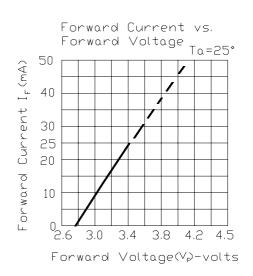



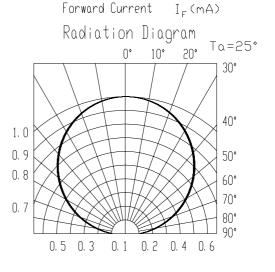


Prepared date: 30-May-2005

Prepared by: Ashley Kuo

Typical Electro-Optical Characteristics Curves

BH

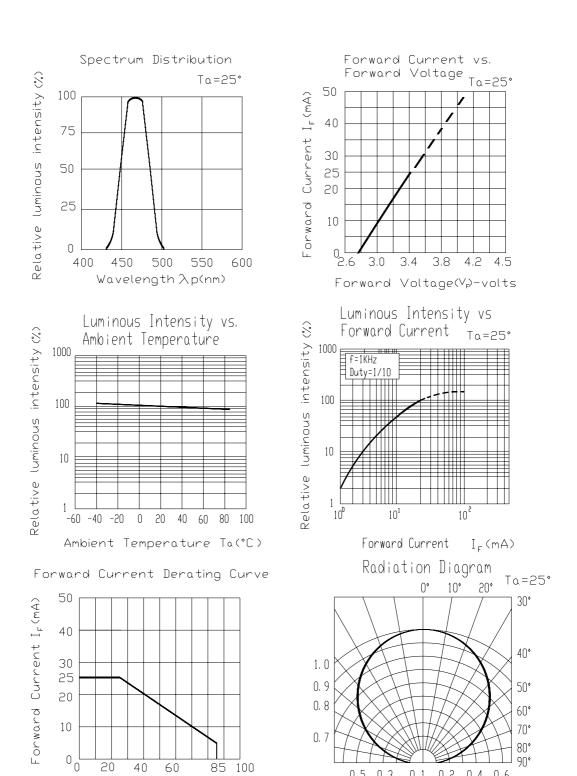

0.3

0. 5

0. 2

0. 4 0.6

0. 1

100

40

60

Ambient Temperature Ta(°C)

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

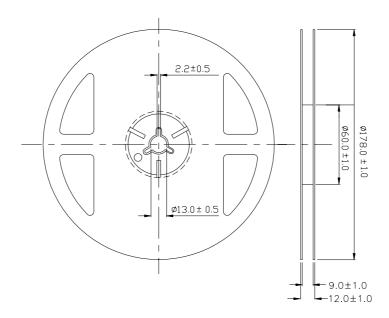


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 7 of 11


Device No: DSE-122-069 Prepared date: 30-May-2005 Prepared by: Ashley Kuo

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

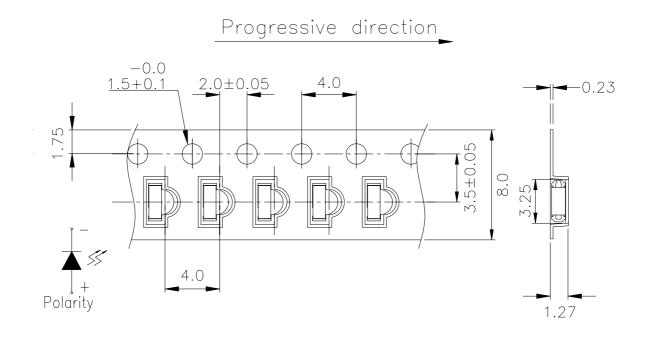

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

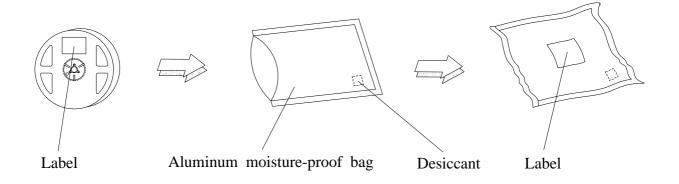

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 8 of 11



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 11

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

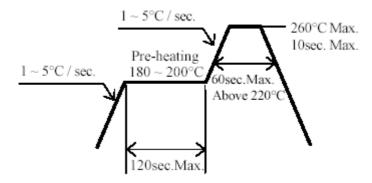

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 11




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

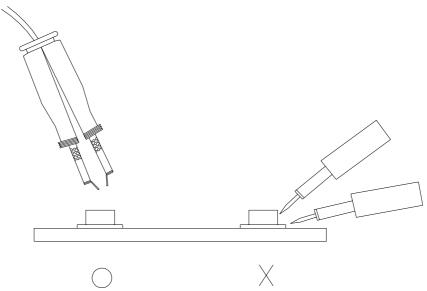

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 11 of 11