

# SPECIFICATION FOR APPROVAL

CUSTOMER : \_\_\_\_\_

PRODUCT TYPE : SMD TCXO 2.0 \* 1.6

NOMINAL FREQ. : 26 MHz

TXC P/N : 7Z26001013

REVISION : S1

CUSTOMER P/N : \_\_\_\_\_

PM / SALES : \_\_\_\_\_

DATE : \_\_\_\_\_

CUSTOMER SIGNATURE & DATE

: \_\_\_\_\_

- (1) TXC requires one copy returned with signature and title of authorized individual that signifies acceptance of the attached specifications.
- (2) Orders received and accepted by TXC after return of signed copy of specification will be produced per these specifications.
- (3) Any changes to these specifications must be agreed upon by both parties and new revision of the Product Specification Sheet will be issued.
- (4) Any issuance of purchase order prior to consigning back the Approval page of "Specification Sheets" from customers will be regarded as the agreement on the contents of these specifications.


Attachment(s):

- 1. Product Specification Sheet
- 2. Testing Report(Electrical & Temperature)
- 3. Reliability Report

**RoHS Compliant**

# PRODUCT SPECIFICATION SHEET

CUSTOMER : \_\_\_\_\_  
PRODUCT TYPE : SMD TCXO 2.0 \* 1.6  
NOMINAL FREQ. : 26 MHz  
TXC P/N : 7Z26001013  
REVISION : S1

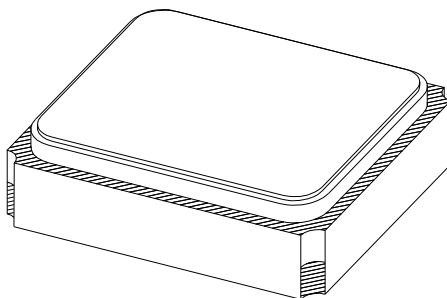

PE/RD	QA	MFG
<i>Kenneth Kao</i>		
2012/8/28		

**NOTE:**

- (1) Lead Free Products are " Directive 2002 / 95 / EC of The European Parliament of 27 January 2003 on the restriction of the use of certain hazardous substances (RoHS) in electrical and electronic equipment" Compliant (Attachment: SGS Test Report).
- (2) Revision "Sx" is for engineering samples only. PE/RD's approval required.
- (3) Revision "Ax" is production ready. PE, QA and MFG's approval required.

**RoHS Compliant**

PRODUCT TYPE : SMD TCXO 2.0 \* 1.6

P/N : 7Z26001013

REVISION : S1

<u>Rev</u>	<u>Revise page</u>	<u>Revise contents</u>	<u>Date</u>	<u>Ref.No.</u>	<u>Reviser</u>
S1	N/A	Initial released	2012/08/28	N/A	Su-Chen Chiang

**■ ELECTRICAL SPECIFICATIONS**

Item	Parameters	Condition	Electrical Specifications				Note
			MIN	TYP	MAX	UNITS	
1	Nominal Frequency		26.000000			MHz	
2	Operating Temperature Range		-40		+85	°C	
3	Supply Voltage		1.70	2.80	3.30	V	
4	Current Drain				1.5	mA	
5	Output Level		0.8			V	1
6	Output Type		Clipped Sinewave				
7	Output Load	Resistance	9	10	11	kΩ	
8		Capacitance	9	10	11	pF	
9	Frequency Tolerance	After 2 times reflow			±2.0	ppm	2
10	Frequency Stability	vs. Temperature	Temp: -30 ~ +85 °C		±0.5	ppm	3,4
11			Temp: -40 ~ -30 °C		±3	ppm	3,4
12		vs. Load	Load: 10 kΩ // 10 pF ±10%		±0.1	ppm	
13		vs. Supply Voltage	Vcc: 2.8V ±5%		±0.1	ppm	
14	Slope of Frequency Drift over Temperature	Temp: -20 ~ +65°C		±0.05	ppm/°C	4	
15		Temp: -30 ~ +85°C		±0.1	ppm/°C		
16		Temp: -40 ~ -30°C		±0.35	ppm/°C		
17	Static Temperature Hysteresis				±0.6	ppm	5
18	Storage Temperature		-40		+85	°C	
19	Start-up Time	vs. Frequency	Within ± 0.5 ppm		2.0	ms	
20		vs. Output Level	To 90% of Vp-p		2.0	ms	
21	Duty Cycle		40	50	60	%	
22	Aging	1 <sup>st</sup> year			±1.0	ppm/year	
23		2 <sup>nd</sup> year			±1.5	ppm/year	
24		5 <sup>th</sup> year			±2.5	ppm/year	
25		10 <sup>th</sup> year			±5	ppm/year	
26	Harmonics				-8	dBc	
27	Phase Noise	@ 1 Hz offset		-50		dBc/Hz	
28		@ 10 Hz offset		-80		dBc/Hz	
29		@ 100 Hz offset		-105		dBc/Hz	
30		@ 1 kHz offset		-130		dBc/Hz	
31		@ 10 kHz offset		-148		dBc/Hz	
32		@ 1 MHz offset		-150		dBc/Hz	

Note 1 Decoupling capacitor is required in external circuit.


Note 2 Refer to nominal frequency

Note 3 Refer to frequency at 25±2°C

Note 4 Minimum of 1 frequency reading every 2°C over temperature, based on temperature varied at maximum of 2°C per minute.

Note 5 Frequency deviation at 25°C after reciprocal temperature cycle over the operating temperature range

**TESTING CIRCUIT**

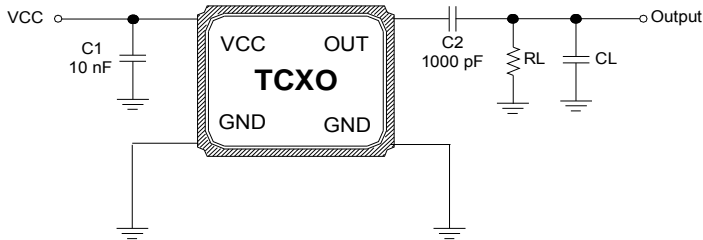


**External Components**

Name	Function
C1	AC Noise Bypass for VCC
C2	DC Block for Output
RL	Load Resistance
CL	Load Capacitance


Note: Bypass capacitor (C1) and DC blocking capacitor (C2) should be placed.

**DIMENSIONS**

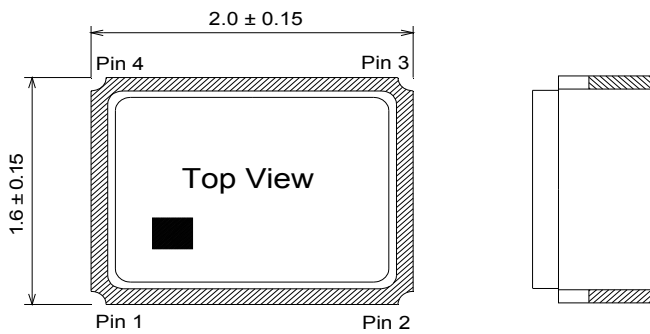


**Pin Connection**


Name	Connection
Pin 1	GND or NC
Pin 2	GND
Pin 3	OUTPUT
Pin 4	VCC

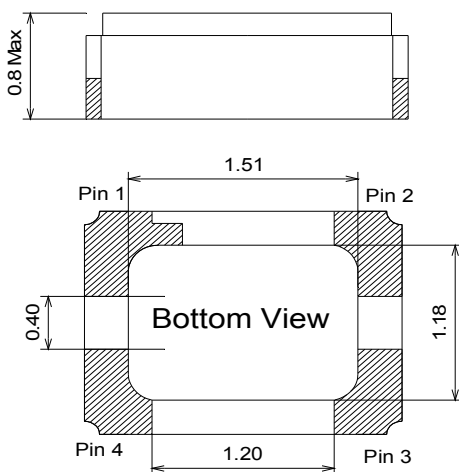

**Recommended Land Pattern**

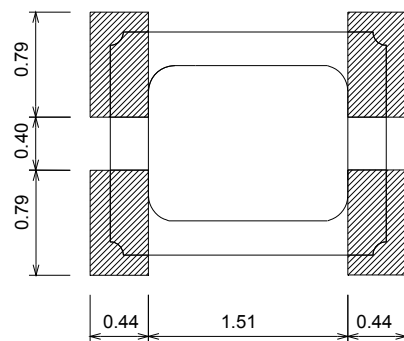


**■ SUGGESTED REFLOW PROFILE**

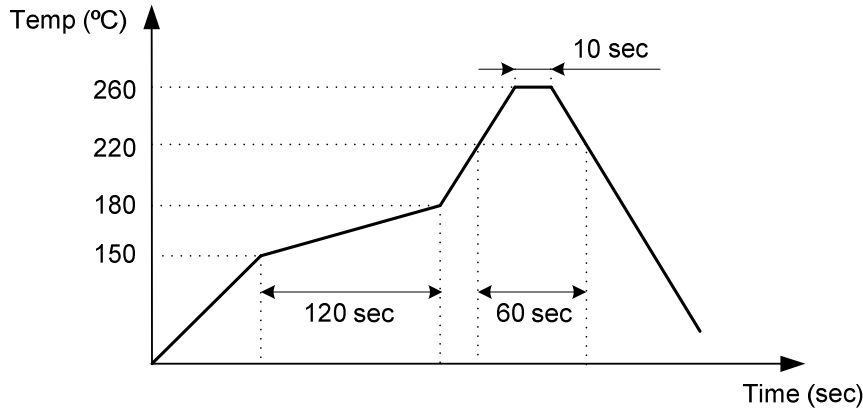

Note : Total Time: 200 sec. Max., Solder Melting Point: 220°C

**■ MARKING**

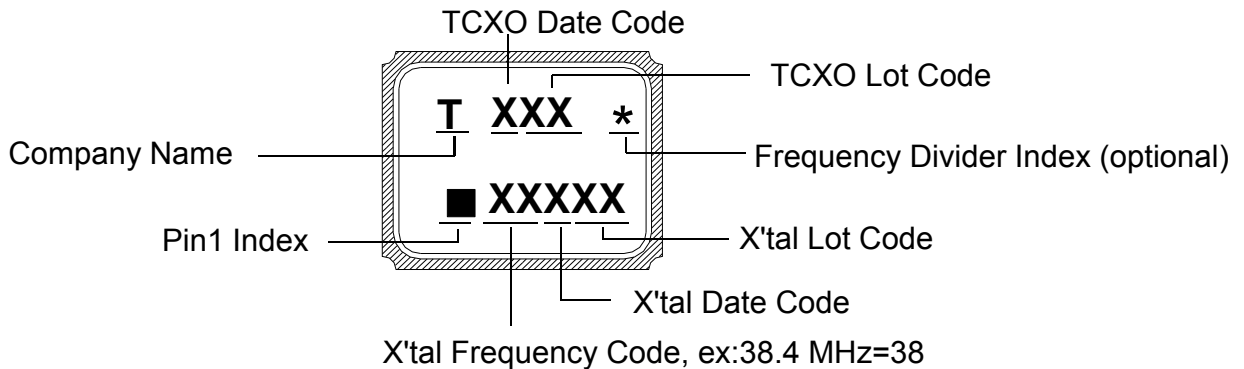


**DATE CODE**

				MONTH											
YEAR				JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2005	2009	2013	2017	A	B	C	D	E	F	G	H	J	K	L	M
2006	2010	2014	2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2007	2011	2015	2019	a	b	c	d	e	f	g	h	j	k	l	m
2008	2012	2016	2020	n	p	q	r	s	t	u	v	w	x	y	z



\* This date code will be cycled every four years.

Note: If TCXO frequency is X'tal frequency divided by 2, then frequency divider index appears.  
 If TCXO frequency is the same as X'tal frequency, then no frequency divider index appears.

■ **PACKING : (EIA-481-2)**

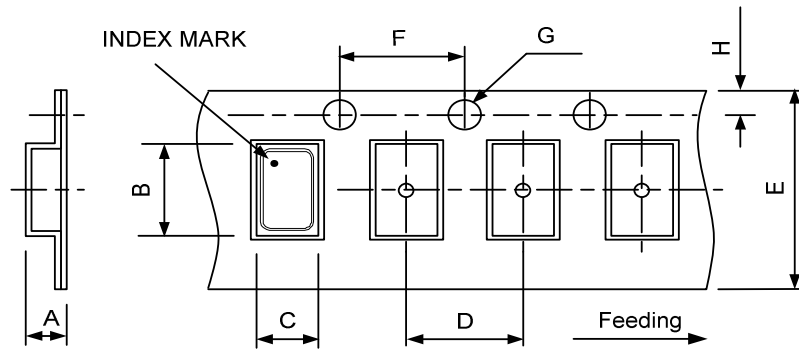

DIMENSIONS	A	B	C	D	E	F	G	H	(UNIT : mm)
	0.90	2.30	1.90	4.00	8.00	4.00	1.55	1.75	

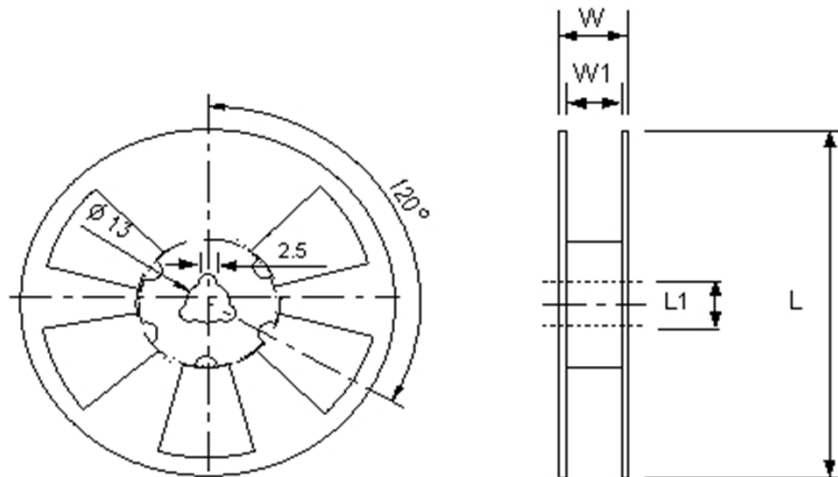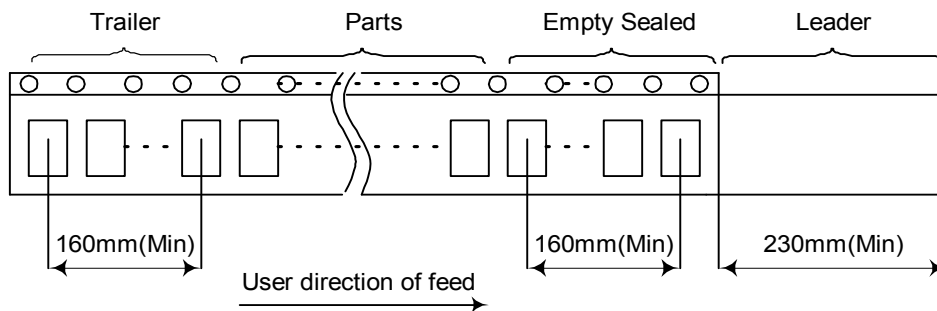


DIMENSIONS	L	L1	W	W1	pcs / Reel (UNIT : mm)
	178	13	11.5	8	Standard Reel Quantity is 3,000 pcs per reel

■ **WEIGHT**

0.00854g / piece(TYP), 25 ± 2 g / 3 kpcs( regardless of tape weight )

**■ STRUCTURE ILLUSTRATION**

Crystal Enclosure Seal: Seam Welding

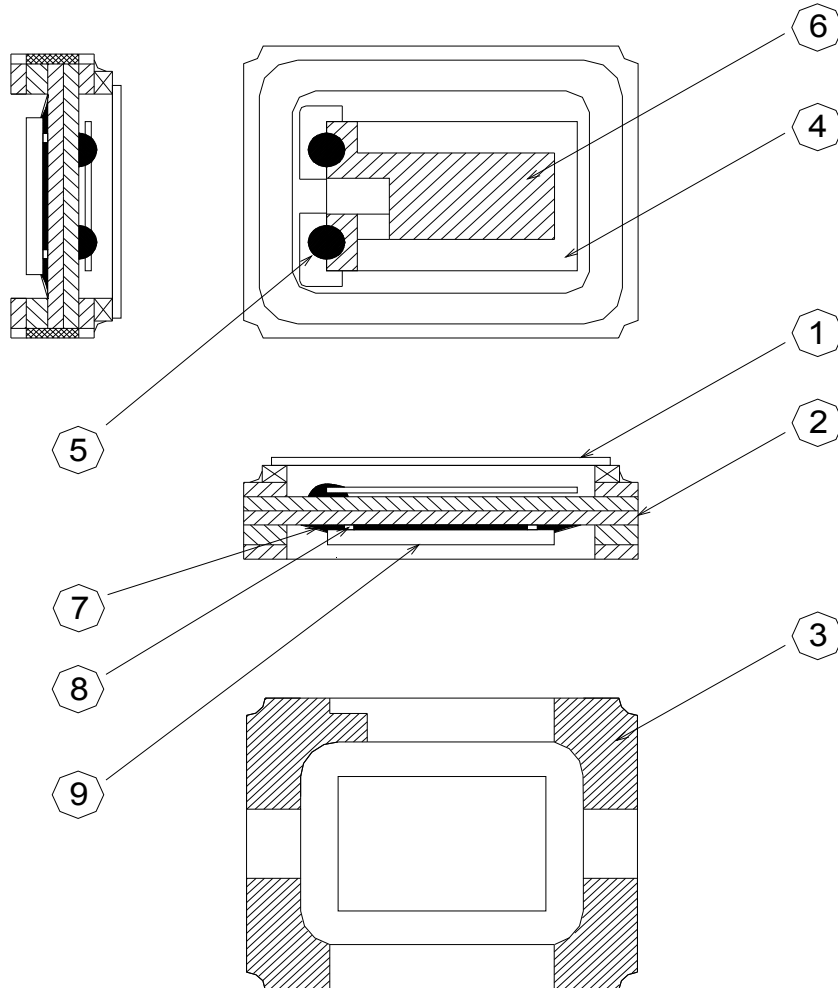

No.	COMPONENTS	MATERIALS	FINISH/SPECIFICATIONS
1	Cap	Metal(Fe + Co + Ni)	-
2	Base	Ceramic	Color Black
3	Pad	Au	Tungsten Metalize + Ni Plating + Au Plating
4	Crystal Blank	SiO <sub>2</sub>	-
5	Conductive Adhesive	Ag	Silicone Resin
6	Electrode	Noble Metal	-
7	Underfill	Organic	Color Black
8	Bump	Au	
9	IC	Si	




## ■ RELIABILITY SPECIFICATIONS

### 1. Mechanical Endurance

No.	Test Item	Test Methods	Criteria
1.1	Drop Test	Height : 100 cm height Direction : X,Y,Z 6 directions Test cycles : 3 cycles Fall freely on to concrete floor Mounting on test fixture (total weight=100 g)	+/- 2.0 ppm
1.2	Mechanical Shock	Acceleration : 1000 g Duration : 0.5 ms Test cycles : 3 times for all 3 directions	+/- 2.0 ppm
1.3	Vibration	Acceleration : 20 g Duration : 4 hours/each direction Frequency range : 10 ~ 2000 Hz Amplitude : 1.52 mm Direction : X,Y,Z 3 directions Sweep speed : 20 minutes/cycle	+/- 2.0 ppm
1.4	Gross Leak	Standard sample for automatic gross leak detector. Test Pressure : 2 kg/cm <sup>2</sup>	< 1.5 × 10 <sup>-5</sup> Pa m <sup>3</sup> / sec
1.5	Fine Leak	Helium bombing 4.5 kgf/cm <sup>2</sup> for 2 hours	< 1.0 × 10 <sup>-9</sup> Pa m <sup>3</sup> / sec
1.6	Solderability	Preheate temperature : 125°C ± 5°C Preheate time : 120 sec Soldering temperature : 245°C ± 5 °C Duration : 5 ± 1 sec Method : Solder bath method	90% Coated

[Note] Criteria mean the maximum frequency change after reliability test, frequency shall be measured at 25°C.

**2. Environmental Endurance**

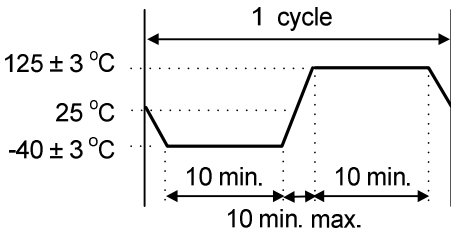No.	Test Item	Test Methods	Criteria
2.1	High Temp. Storage	Temperature : +125°C ± 3°C Duration : 168 hours	+/- 2.0 ppm
2.2	Low Temp. Storage	Temperature : -40°C ± 3°C Duration : 500 hours	+/- 2.0 ppm
2.3	Thermal Shock (Air to Air)	Total 100 cycles of the following temperature cycle : 	+/- 2.0 ppm
2.4	High Temp & Humidity	Temperature : 85°C ± 3°C Humidity: RH 85% Duration : 168 hours	+/- 2.0 ppm
2.5	Aging	Temperature : 85°C ± 3°C Duration : 500 hours Voltage input by specification	+/- 2.0 ppm

[Note] Criteria mean the maximum frequency change after reliability test, frequency shall be measured after 2 hours at 25°C leaving.