
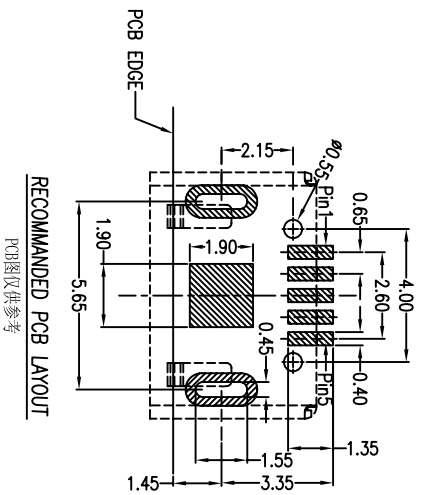
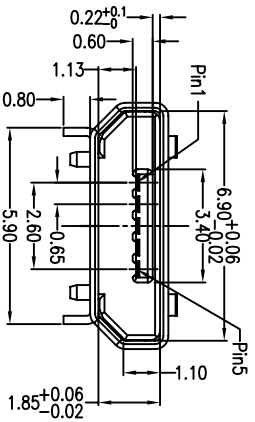
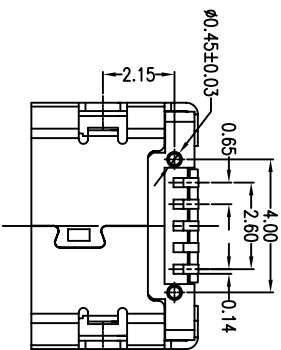





目錄
MAPX

變更內容
MODIFICATION

日期
DATE



- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f:UL94V-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating:1.5PIN 1.8A Max/2.3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C

- A 01 S B X X X X X X X X XX-457
- ① 外壳材料 1:G289RH
 - ② 外壳电镀 1: Ni50U²
 - ③ 2: 黑色
 - ④ 3: Ni+Au1u² (脚)
 - ⑤ 4: Au1u²
 - ⑥ 端子电镀 01: Au1u², 02: Au1.5u², 03: Au3u², 05: Au5u², 10: PdAu10u², 15: PdAu15u², 30: Au30u²
 - ⑦ 主体颜色 B: 黑色
 - ⑧ 主体材质 1: LCP
 - ⑨ 3: Ni+Au1u² (脚)
 - ⑩ 4: Au1u²
 - ⑪ 端子材质 4: G519H-EH

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X	±0.25	X'	±5'
X	±0.20	X'	±2'
.XX	±0.15	.XX'	±1'
.XXX	±0.10	.XXX'	±0.5'

单位
UNITS

比例
SCALE

产品料号
PRODUCT PART NO.

MM	1:1	Z-Y-B	Micro usb 5s B Type 有脚排针五位插板5.9
DATE	2014.04.14	角法	版本
DRAWING	审核	VIEW	VER
CHD	APPD		A0