

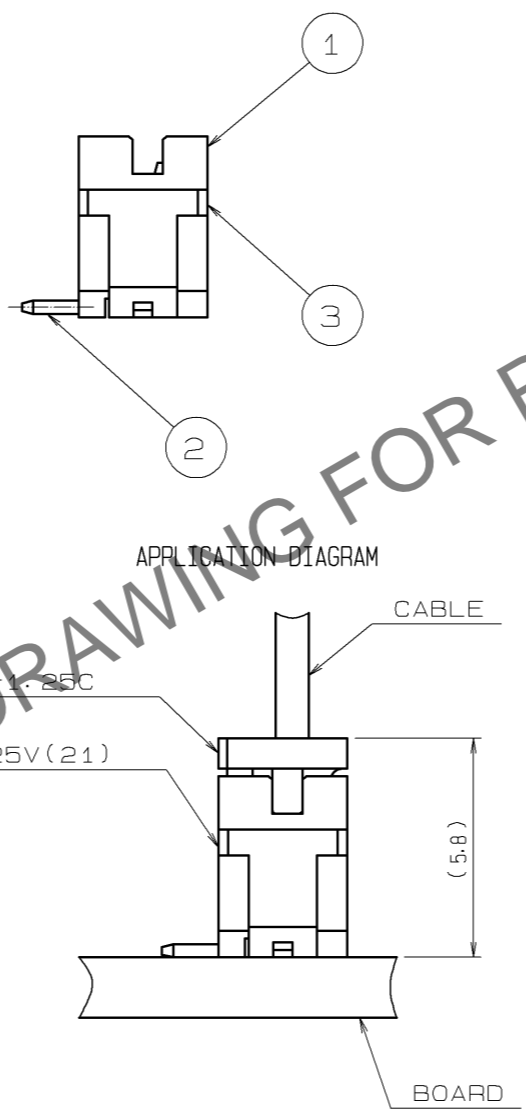
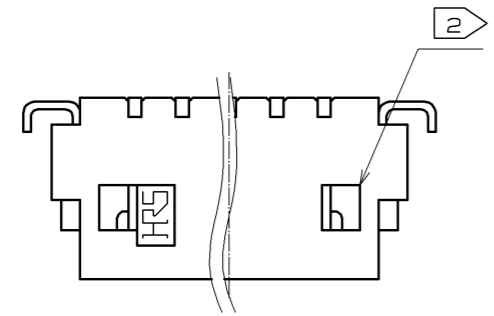
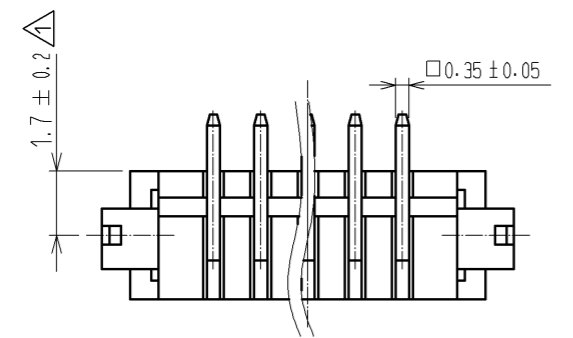
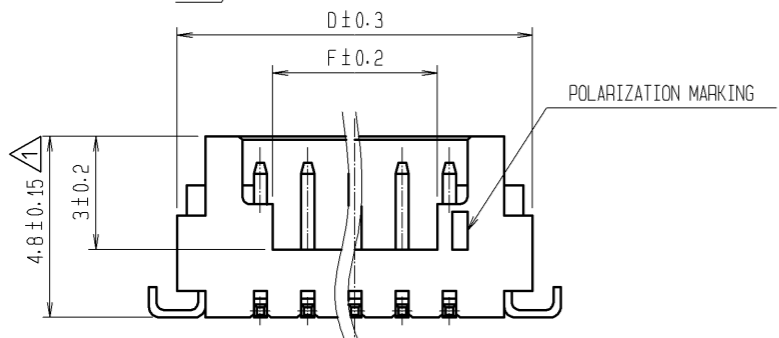


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

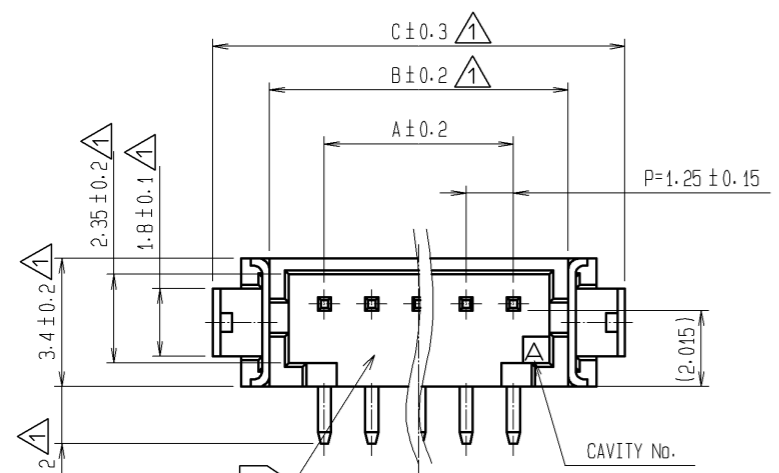

| CODE No.        | CONTACT | A     | B     | C     | D     | E     | F     |
|-----------------|---------|-------|-------|-------|-------|-------|-------|
| CL536-0401-2-21 | 2       | 1.25  | 4.15  | 7.15  | 5.65  | 1.95  | 2.2   |
| CL536-0402-5-21 | 3       | 2.5   | 5.4   | 8.4   | 6.9   | 3.2   | 3.45  |
| CL536-0403-8-21 | 4       | 3.75  | 6.65  | 9.65  | 8.15  | 4.45  | 3.1   |
| CL536-0404-0-21 | 5       | 5.0   | 7.9   | 10.9  | 9.4   | 5.7   | 4.35  |
| CL536-0405-3-21 | 6       | 6.25  | 9.15  | 12.15 | 10.65 | 6.95  | 5.6   |
| CL536-0406-6-21 | 7       | 7.5   | 10.4  | 13.4  | 11.9  | 8.2   | 6.85  |
| CL536-0407-9-21 | 8       | 8.75  | 11.65 | 14.65 | 13.15 | 9.45  | 8.1   |
| CL536-0408-1-21 | 9       | 10.0  | 12.9  | 15.9  | 14.4  | 10.7  | 9.35  |
| CL536-0409-4-21 | 10      | 11.25 | 14.15 | 17.15 | 15.65 | 11.95 | 10.6  |
| CL536-0410-3-21 | 11      | 12.5  | 15.4  | 18.4  | 16.9  | 13.2  | 11.85 |
| CL536-0411-6-21 | 12      | 13.75 | 16.65 | 19.65 | 18.15 | 14.45 | 13.1  |
| CL536-0413-1-21 | 14      | 16.25 | 19.15 | 22.15 | 20.65 | 16.95 | 15.6  |
| CL536-0414-4-21 | 15      | 17.5  | 20.4  | 23.4  | 21.9  | 18.2  | 16.85 |

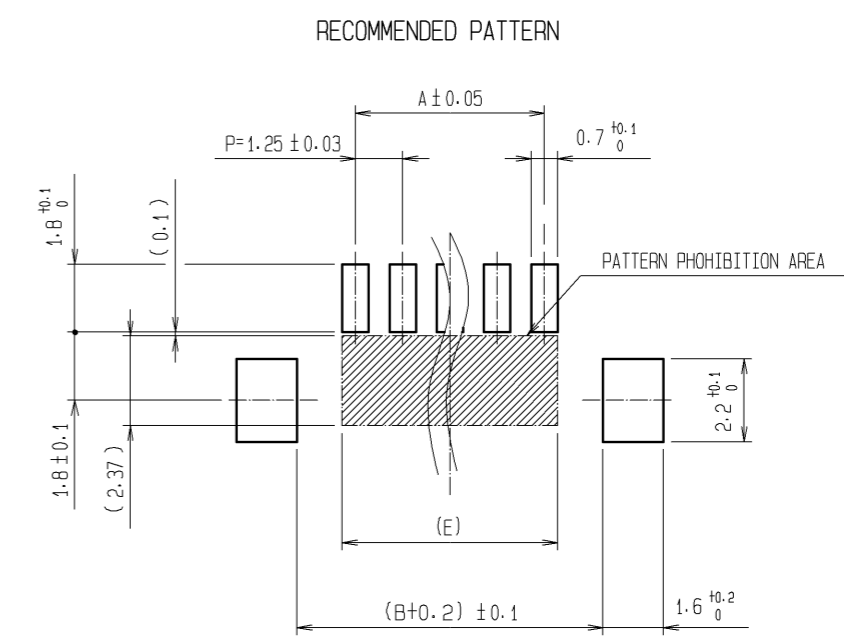

- NOTES
- 1 WHEN THIS CONNECTOR MATES WITH DF13-\*S-1.25C, THE MATING LENGTH IS 5.8mm.
  - 2 WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK SHALL BE SET AT THE CENTER OF HOUSING. IF MORE THAN FOUR, THE TWO LOCKS SHALL BE SET AS SHOWN ON THIS DRAWING.
  - 3 LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS SHALL BE WITHIN 0.1mm.
  - 4 AREA TO PICK AND PLACE.

| NO. | MATERIAL        | FINISH | REMARKS                      | NO. | MATERIAL  | FINISH | REMARKS                      |
|-----|-----------------|--------|------------------------------|-----|-----------|--------|------------------------------|
| 3   | PHOSPHOR BRONZE |        | SURFACE: TIN PLATED 1μm min. | 5   | POLYESTER |        | COVER TAPE: CLEAR            |
| 2   | BRASS           |        | SURFACE: TIN PLATED 1μm min. | 4   | PS        |        | EMBOSSED CARRIER TAPE: CLEAR |
| 1   | POLYAMIDE       |        | UL94V-0, (BEIGE)             |     |           |        |                              |

|                         |    |          |       |             |   |                          |              |             |          |
|-------------------------|----|----------|-------|-------------|---|--------------------------|--------------|-------------|----------|
| UNITS                   | mm | SCALE    | 5 : 1 | COUNT       | 8 | DESCRIPTION OF REVISIONS | DESIGNED     | CHECKED     | DATE     |
|                         |    |          |       |             |   | DIS-H-005399             | TS. KUMAZAWA | HK. UMEHARA | 10.12.14 |
| APPROVED : TY. OMA      |    | 05.10.31 |       | DRAWING NO. |   | EDC3-083672-03           |              |             |          |
| CHECKED : HK. UMEHARA   |    | 05.10.31 |       | PART NO.    |   | DF13C-*P-1.25V(21)       |              |             |          |
| DESIGNED : TS. KUMAZAWA |    | 05.10.31 |       | CODE NO.    |   | CL536-                   |              |             |          |
| DRAWN : AK. MIURA       |    | 05.10.27 |       |             |   |                          |              |             |          |

