


**DESCRIPTION**

The KESD5Zxxx is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in cellular phones, portable devices, digital cameras, power supplies and many other portable applications.

**ORDERING INFORMATION**

- ✧ Package: SOD-523
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

**PIN CONFIGURATION**



**FEATURES**

- ✧ IEC61000-4-2 Level 4 ESD Protection
- ✧ Protects one directional I/O line
- ✧ Low clamping voltage
- ✧ Working voltages : 2.5V,3.3V, 5V,6V,7V,12V,15V
- ✧ Low leakage current

**MACHANICAL DATA**

- ✧ SOD-523 package
- ✧ Flammability Rating: UL 94V-0
- ✧ Packaging: Tape and Reel
- ✧ High temperature soldering guaranteed:260°C/10s
- ✧ Reel size: 7 inch

**APPLICATIONS**

- ✧ Cell Phone Handsets and Accessories
- ✧ Microprocessor based equipment
- ✧ Personal Digital Assistants (PDA's)
- ✧ Notebooks, Desktops, and Servers
- ✧ Portable Instrumentation
- ✧ Peripherals
- ✧ Pagers

**PACKAGE OUTLINE**



**ABSOLUTE MAXIMUM RATING**

Symbol	Parameter	Value	Units
V <sub>ESD</sub>	ESD per IEC 61000-4-2 (Air)	±30	kV
	ESD per IEC 61000-4-2 (Contact)	±22	
ESD	ESD Voltage per human body model	16	kV
	ESD Voltage per machine model	400	V
P <sub>D</sub>	Total Power Dissipation on FR-5 Board (Note 1) @ Ta=25°C	150	mW
T <sub>J</sub> , T <sub>STG</sub>	Junction and Storage Temperature	-55/+150	°C
T <sub>L</sub>	Lead Solder Temperature – Maximum (10 Second Duration)	260	°C

These ratings are limiting values above which the serviceability of the diode may be impaired

Note 1. FR-5=1.0x0.75x0.62 in.

**ELECTRICAL CHARACTERISTICS (Tamb=25°C)**

PART NUMBER	DEVICE MARKING	V <sub>RWM</sub>	I <sub>R</sub>	V <sub>B</sub>	I <sub>T</sub>	V <sub>C</sub>		V <sub>C</sub>		P <sub>PK</sub>	C <sub>J</sub>
		(V)	(μA)	(V)	(mA)	(V)	@A	(V)	@A	(W)	(pF)
		Max	Max	Min		Max		Max		Max	Max
KESD5Z2.5	ZD + code	2.5	6.0	4.0	1	9.0	5.0	11.5	9.0	104	145
KESD5Z3.3	ZE + code	3.3	0.90	5.0	1	10.0	5.0	14.0	7.5	105	105
KESD5Z5.0	ZF + code	5.0	0.08	6.2	1	11.6	5.0	15.0	7.0	105	80
KESD5Z6.0	ZG + code	6.0	0.05	6.8	1	13.5	5.0	17.5	6.0	105	70
KESD5Z7.0	ZH + code	7.0	0.03	7.5	1	14.0	5.0	18.0	6.0	108	65
KESD5Z12	ZM + code	12.0	0.03	14.1	1	20.0	1.0	26.0	4.0	104	45
KESD5Z15	ZN + code	15.0	0.50	16.0	1	23.0	1.0	30.0	4.0	120	28

**ELECTRICAL CHARACTERISTICS CURVE**

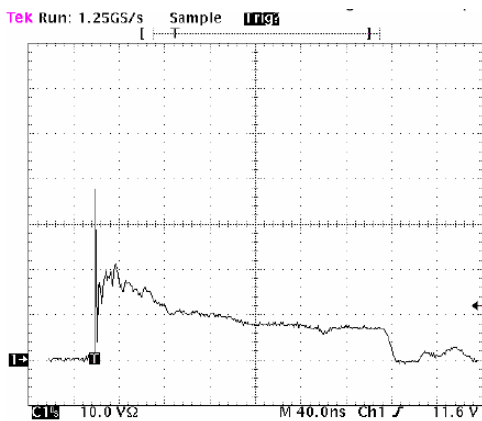


Figure 1. ESD Clamping Voltage Screenshot Positive 8 kV contact per IEC 61000-4-2


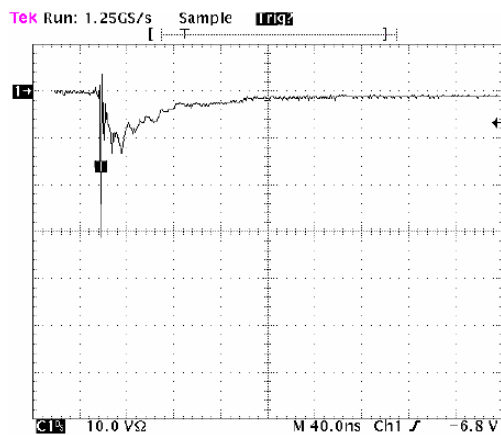


Figure 2. ESD Clamping Voltage Screenshot Negative 8 kV contact per IEC 61000-4-2

**SOD-523 PACKAGE OUTLINE DIMENSIONS**

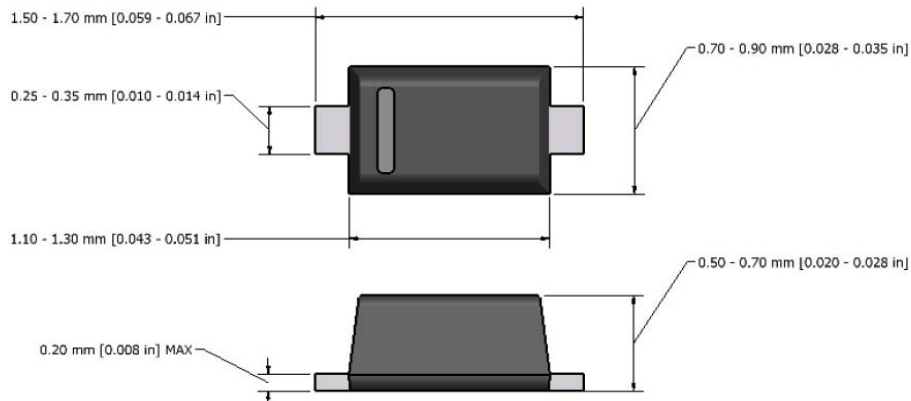

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.