


ROHS

http://www.smtswitch.com


Typical Specifications
1. Rating : 5A120V AC
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 30,000 cycles

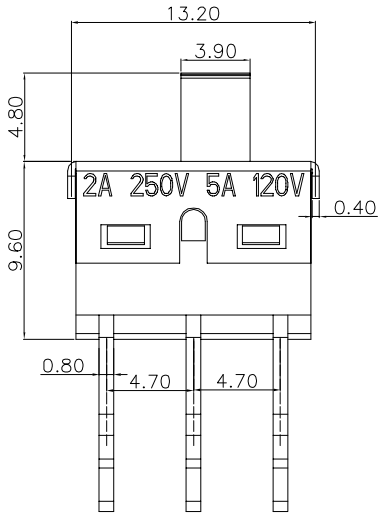


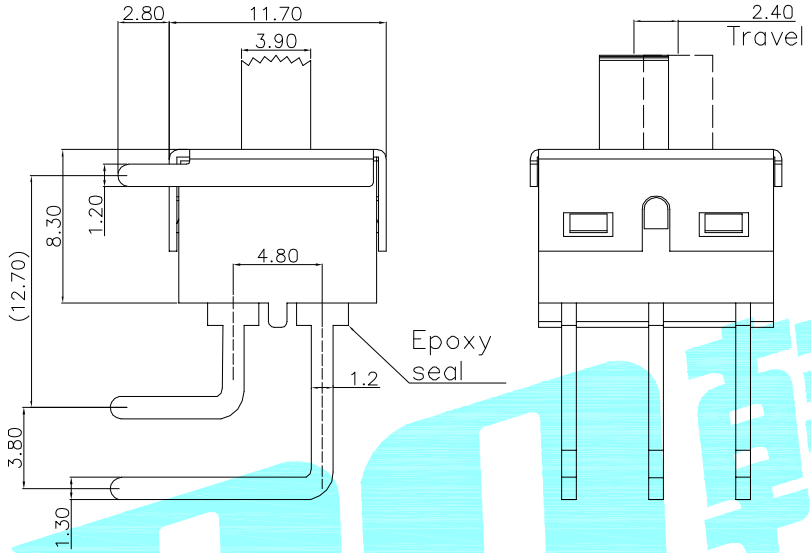



Circuit Diagram



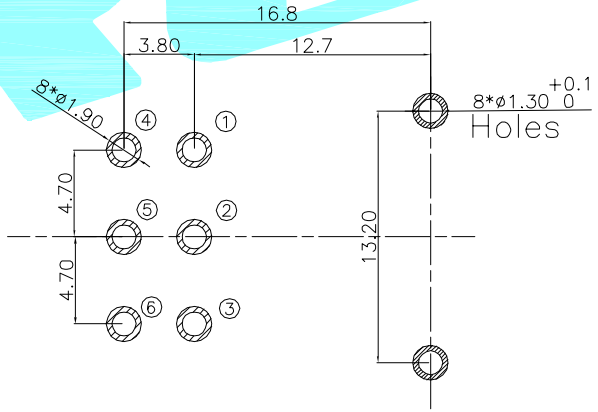

PCB Layout(pattern side)

PART NO	vigor
1	300±100

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	——	6	Copper	Plating silver	——
④	Contact	——	1	F.Ag/C5210	——	——
③	Base	——	1	PA	Black	——
②	Cover	——	1	SPCC	Plating Sn	——
①	Keystoke	——	1	PA	RED	——

APPROVALS		DATE	HRO韩京® ELECTRONICS CO.,LTD
DRAWN	JKUN.LU	2015.05.25	
CHECKED			TITLE: Slide SWITCHS
APPROVALS			PART NO. K3-2391B

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO. ——		SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——