

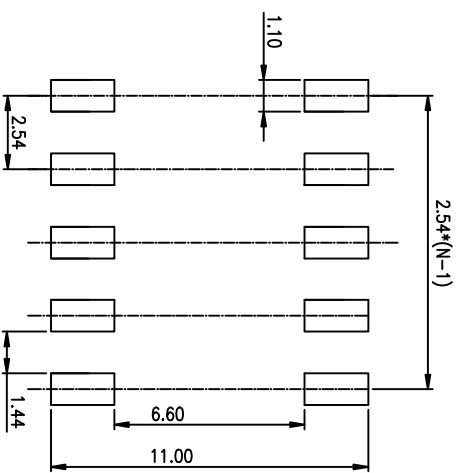
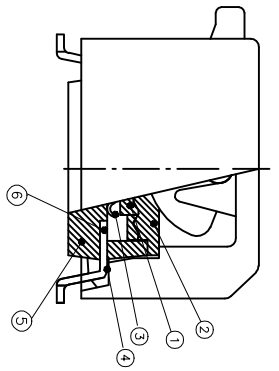
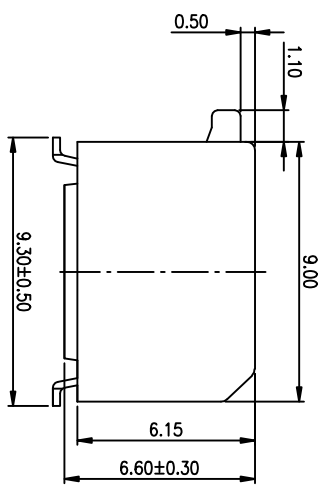


PRODUCT NO.	DSPV05LSGET
RoHS compliant	

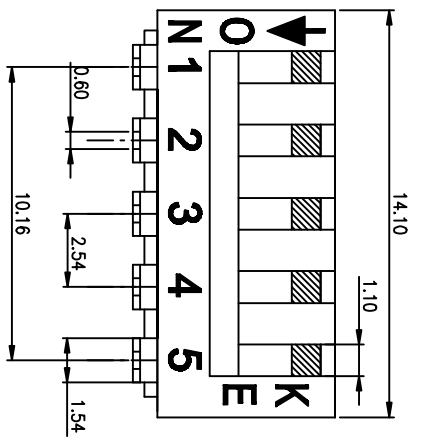

DS XX T S G E T

[Packing: T=Tube R=Reel]
 [Finish: F=3u" Gold-plated F=10u" Gold-plated]
 [Finish: G=Full Gold S=Contact-Gold-plated]
 [Terminal: S=SMD type B=Strait.....]
 [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]
 [HP=Half Pitch IC=IC type PV=Plano type]

- NOTES : 1 Specification:
- 1>.Operating force: 10000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life: 3000cycles minimum
 - 5>Electrical Life: 2000cycles minimum
2. PLATING:
 GOLD FLASH 1u"(min.) SOLDER TALL,
 3u" GOLD PLATING ON THE CONTACT AREA,
 WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. CONTACT RATING:
 1. SWITCHING: 25mA at 24VDC
 2. NON-SWITCHING: 100mA at 50VDC
 WITH 50u" NICKEL UNDERPLATINGOVERALL.
4. PART NUMBER DESCRIPTION :

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINER	ANGLES	COPY	PROJECTION
0 ± 0.25	0 ± 2'		
.00 ± 0.15	.0 ± 1'		
.000± 0.10	.00± 0.5'		
DESIGN	kathy	03/20/12'	
DRAWING			
CHECK			
APPRO.			

BY DSPV SERIES PITCH 2.54mm PRODUCT FAMILY DSPV SERIES PRAT NO. DSPV05LSGET			
FILE NO.	DSPV05LSGET-A	SIZE	A4
UNIT	mm	SCALE	1:1
SHEET	1	SHEET	1
REV.	A	REV.	A