
EVERLIGHT

GHT

DATASHEET

SMD B 23-21/R6SC-BL2M2AX/2A



Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The 23-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInP	Brilliant Red	Water Clear

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	I _F	50	mA
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	100	mA
Power Dissipation	Pd	120	mW
Electrostatic Discharge	ESD _{HBM}	2000	V
Operating Temperature	T _{opr}	-40 ~ +85	°
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	Reflow Soldering : 260 $^\circ\!\!\mathbb{C}$ for Hand Soldering : 350 $^\circ\!\!\mathbb{C}$ for	

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	14.5		28.5	mcd	
Viewing Angle	20 _{1/2}		130		deg	_
Peak Wavelength	λр		632		nm	
Dominant Wavelength	λd	617.5		629.5	nm	⁻ I _F =2mA
Spectrum Radiation Bandwidth	Δλ		20		nm	_
Forward Voltage	V _F	1.55		2.15	V	
Reverse Current	I _R			10	μA	V _R =5V
Note: 1.Tolerance of Luminous Intensity: ±11% 2.Tolerance of Dominant Wavelength ±1nm 3. Tolerance of Forward Voltage: ±0.1V						

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
L2	14.5	18.0		
M1	18.0	22.5	mcd	I _F =2mA
M2	22.5	28.5		

Bin Range Of Dom. Wavelength

Bin Code	Min.	Max.	Unit	Condition
E4	617.5	621.5		
E5	621.5	625.5	nm	I _F =2mA
E6	625.5	629.5	_	

Bin Range Of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
00	1.55	1.75		
0	1.75	1.95	V	I _F =2mA
1	1.95	2.15		


Note:

1.Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength ±1nm


3. Tolerance of Forward Voltage: ±0.1V

Typical Electro-Optical Characteristics Curves

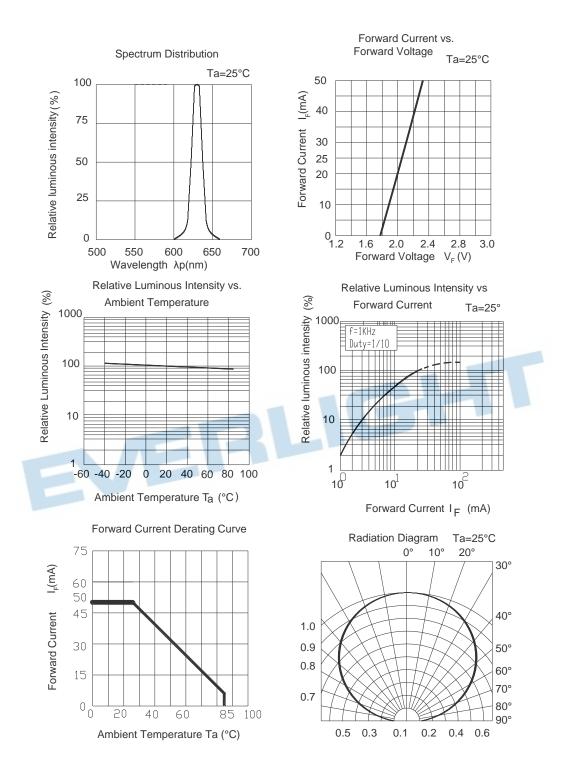

EVERLIGHT

Package Dimension

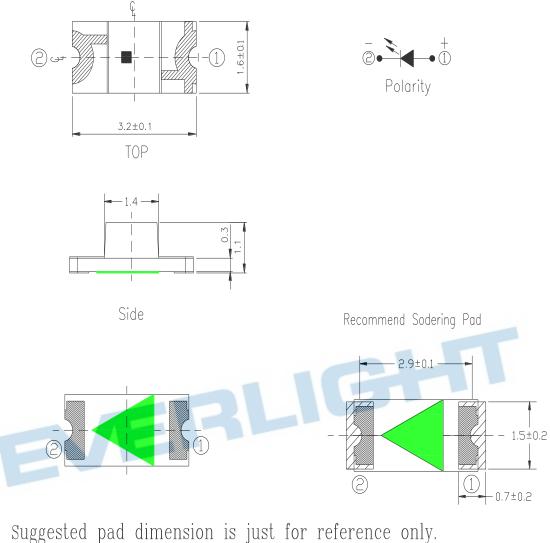


Please modify the pad dimension based on individual need.

Note: 1.Tolerances unless mentioned ±0.1mm. Unit = mm 2. WSN indicates Wistron Special Need, its "Security ball" process




Moisture Resistant Packing Materials Label Explanation



CPN: Customer's Product Number

- P/N: Product Number
- QTY: Packing QuantityCAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number


Reel Dimensions

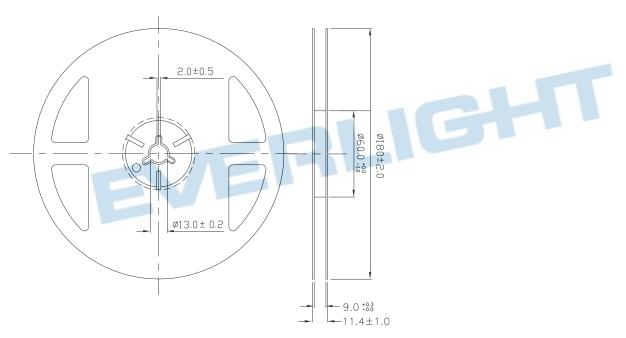


Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm



Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

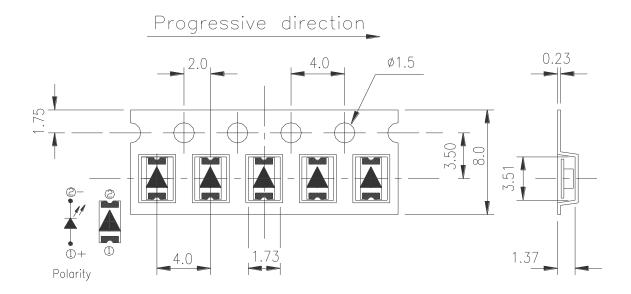

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

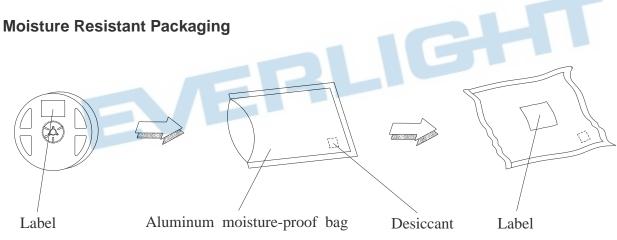




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 60%RH or less.
- 2.3 The LED's should be used within 168 hours(7 days) after opening the package.
- If unused LEDs remain, it should be stored in moisture proof packages
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5℃ for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

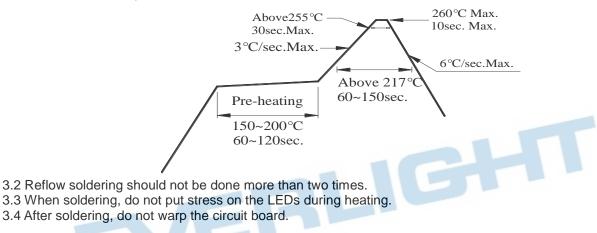


4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.



DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT

