EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

0603 Package Chip LED (0.6 mm Height)

19-213/BHC-AN1P2/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version

Descriptions


- The 19-213 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

D (N)		T 01		
Part No.	Material	Emitted Color	Lens Color	
19-213/BHC-AN1P2/3T	InGaN	Blue	Water Clear	



Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com


Prepared date:15-NOV-2006


Rev. 1 Pag


Page: 1 of 10




Package Outline Dimensions








For reflow soldering (Propose)





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com Prepared date:15-NOV-2006 Rev. 1 Page: 2 of 10



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	Vr	5	V	
Forward Current	I F	25	mA	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	100	mA	
Power Dissipation	Pd	110	mW	
Electrostatic Discharge(HBM)	ESD	150	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\! \mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5		72.0	mcd	
Viewing Angle	2 \theta 1/2		120		deg	
Peak Wavelength	λp		468		nm	
Dominant Wavelength	λd	464.5		476.5	nm	IF=20mA
Spectrum Radiation Bandwidth	Δλ		35		nm	
Forward Voltage	VF	2.7	3.3	3.7	V	
Reverse Current	Ir			50	μ A	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com

Prepared date:15-NOV-2006

Rev. 1 Page: 3 of 10



Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	A9	464.5	467.5	nm	IF=20mA
	A10	467.5	470.5		
	A11	470.5	473.5		
	A12	473.5	476.5		

Bin Range Of Luminous Intensity

		<u> </u>		
Bin	Min	Max	Unit	Condition
N1	28.5	36.0		
N2	36.0	45.0	,	T- 20 A
P1	45.0	57.0	mcd	IF=20mA
P2	57.0	72.0		

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01


http://www.everlight.com


Prepared by: Men Qingling


Downloaded from Arrow.com.





Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com Prepared date:15-NOV-2006

Rev. 1 Page: 5 of 10 Prepared by: Men Qingling

Downloaded from Arrow.com.



Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

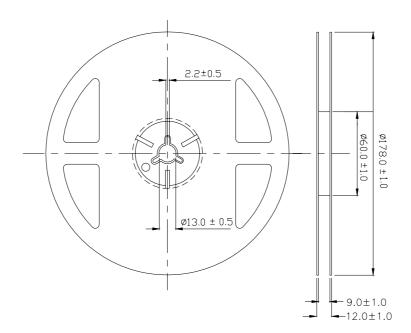

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01


http://www.everlight.com

Prepared date:15-NOV-2006

Rev. 1 Page: 6 of 10




Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

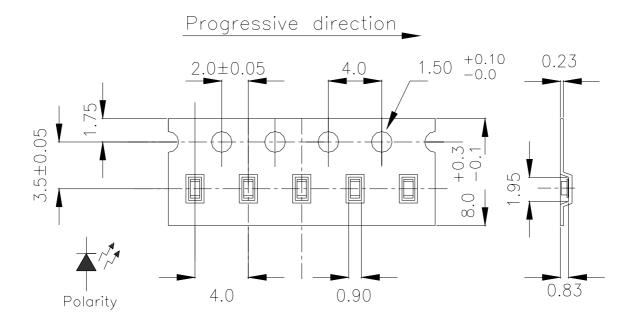

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

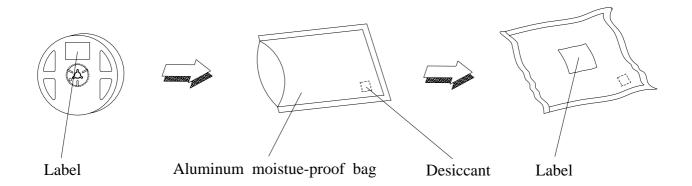

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com Prepared date:15-NOV-2006 Rev. 1 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com Prepared date:15-NOV-2006 Rev. 1 Page: 8 of 10
Prepared by: Men Qingling

Downloaded from Arrow.com.

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

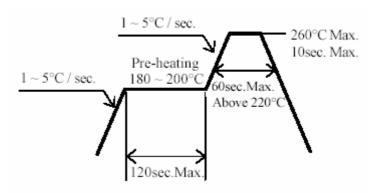

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com

Prepared date:15-NOV-2006

Rev. 1 Page: 9 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

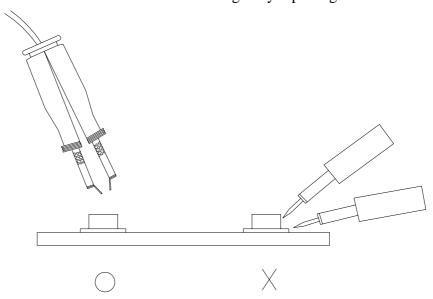

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. Device No:SZDSE-193-B01

http://www.everlight.com

Rev. 1

Page: 10 of 10

Prepared date:15-NOV-2006



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download
Daily Updated Database
100% Free Datasheet Search Site
100% Free IC Replacement Search Site
Convenient Electronic Dictionary
Fast Search System

www.EEworld.com.cn

All Datasheets Cannot Be Modified Without Permission

Copyright © Each Manufacturing Company



This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download
Daily Updated Database
100% Free Datasheet Search Site
100% Free IC Replacement Search Site
Convenient Electronic Dictionary
Fast Search System

www.EEworld.com.cn

All Datasheets Cannot Be Modified Without Permission

Copyright © Each Manufacturing Company