




陶瓷气体放电管 Ceramic Gas Discharge Tube

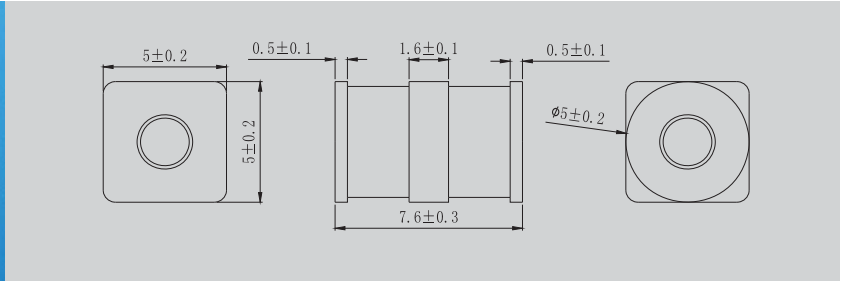

目录编号 Catalog No.	直流击穿电压 DC Spark Over Voltage (100v/s) V	冲击击穿电压 Impulse Spark Over Voltage (1kv/ μ s) V	绝缘电阻 Insulation Resistance G Ω	极间电容 Electrode Capacitance 1MHz 0.5V PF	耐短波电流 Impulse Discharge Current (8/20 μ s 10 times)	耐交流电流 AC Discharge Current (50Hz 1s 10 times) A
5TS075L	075 \pm 20%	\leq 600	\geq 1	\leq 1.5	5KA	5A
5TS090L	090 \pm 20%	\leq 600	\geq 1	\leq 1.5	5KA	5A
5TS150L	150 \pm 20%	\leq 600	\geq 1	\leq 1.5	5KA	5A
5TS230L	230 \pm 20%	\leq 700	\geq 1	\leq 1.5	5KA	5A
5TS350L	350 \pm 20%	\leq 1000	\geq 1	\leq 1.5	5KA	5A
5TS420L	420 \pm 20%	\leq 1000	\geq 1	\leq 1.5	5KA	5A
5TS470L	470 \pm 20%	\leq 1200	\geq 1	\leq 1.5	5KA	5A
5TS600L	600 \pm 20%	\leq 1400	\geq 1	\leq 1.5	5KA	5A
5TS800L	800 \pm 20%	\leq 1600	\geq 1	\leq 1.5	5KA	5A

- 参考执行标准: ITU-T K.12, GB/T9043-2008 《通信设备过电压保护用气体放电管通用技术条件》。
Reference executive standard: ITU-T K.12, GB/T9043-2008 《General Technical Requirements of Gas Discharge Tubes for the Over-voltage protection of telecommunications installations》.
- 耐交流 (50 Hz) 电流最大 5A, 试验时交流电压应大于直流击穿电压上限值。
The maximum AC withstand current (50 Hz) is 5 A and AC voltage shall be larger than the upper limit value of DC spark-over voltage during the test.
- 极间电容测试频率为1MHz, 测试电压为0.5V。
The electrode capacitance test frequency is 1MHz and test voltage is 0.5V.

工作与储存温度 Operating and Storage temperature

-40°C ~ +85°C

包装 Packaging

产品采用吸塑盒包装, 100PCS/盒, 每包装箱装4000PCS
Automaton taped 100PCS per reel, 4000PCS per carton