
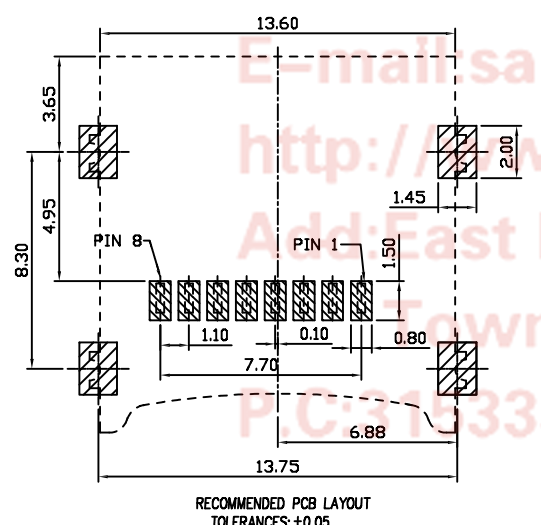


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/14'		

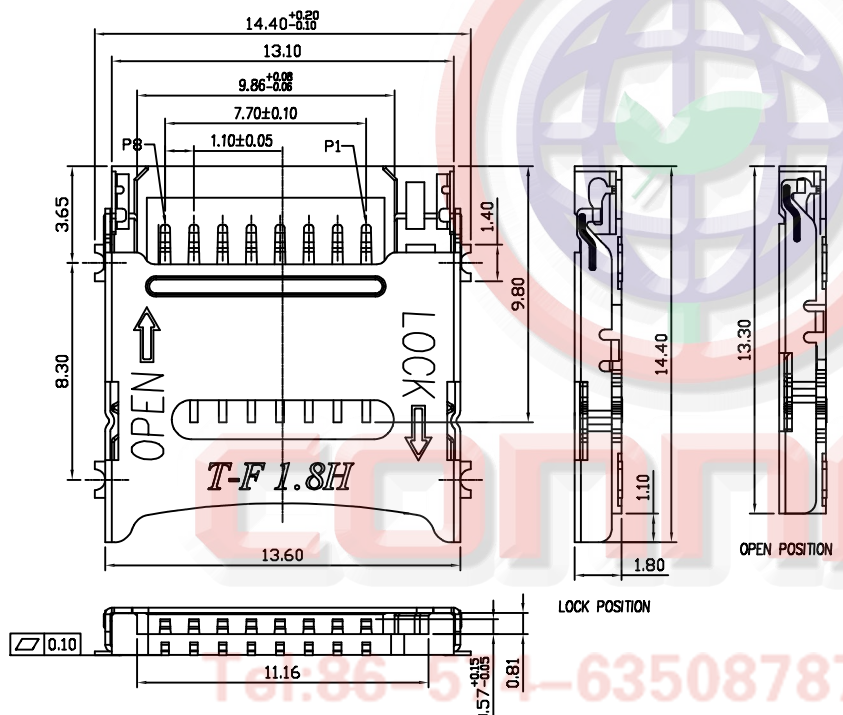

Notes:

1. Material:
 1.1. Housing: High Temperature LCP, UL94V-0 Roted Color: Black.
 1.2. Contacts: Copper Alloy.
 1.3. Stator: Copper Alloy.
 1.4. Shell: Stainless Steel.

2. Specifications:
 2.1. Operate Temperature: -40° C~+105° C
 2.2. Insulation Resistance: 1000MΩ Min.
 2.3. Contact Resistance: 30mΩ max.
 2.4. Withstanding Voltage: 500V AC 1min.
 2.5. Operating Voltage: 30V AC/DC.
 2.6. Current Rating: 1.0A

3. Product Number Code:

DS1139-06 - XX X X X X X X

- Packing Type
R: Tape On Reel
- Shell Plating
S: Stainless
- Housing color
B: Black
- Contact Plating
4: Selective 3u" gold
- Mounting type
S: SMT type
- Connector type
S: Socket
- No. of contacts
08:08pin

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@connfly.com

http://www.connfly.com

Address: East Industry Zone KuangYan

Town Cixi Ningbo China

P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
Micro SD Card ZIF H=1.8mm SMT Type	
SERIES	DS1139-06 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1139-06-XXXXXXX-A

晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD